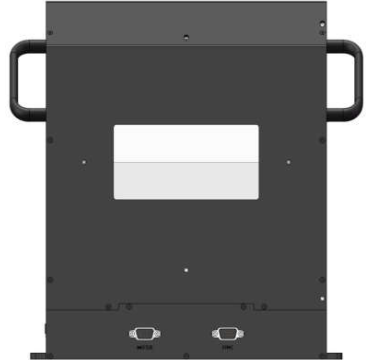


SHENZHEN HONY OPTICAL CO.,LIMITED

ADDRESS: 4th Floor, building A, Jinlaiwang Science Park, Jiayi Industril Zoon, Guiyue Road, Guihua village, Guanlan town,
 Baoan District, Shenzhen, China
TEL:0755-29045537 **FAX:**0755-29045524 **Mobile:**+86-13420984069

HONY3D-T Parameters			
   	Turbo Screen	Polarizer Dimensions	270*333*108mm
		Optical Principle	Circular Polarization
		Light Transmittance	75%
		Cross talk ratio	<1.5%
		light Efficiency	30%
		contrast Ratio	>150: 1
		Suported Frame Rate	24/48/60 fps
		2D/3D Intelligent Switchover(TMS)	available
		one-click Transposition of left and right picture	available
	Silver Screen	Gain coefficient	> 2.4
		Polarization contrast	> 150: 1
Digital Projector		Supported Brands	NEC, Barco, Christie
		Supported Luminance	33000lm
		Dark Time	650us
		Delay time	-200us
Projection Hall		Throw Ratio	1.25:1
		Distance	10~30m